



CONTINUOUS CONCRETE INSERT

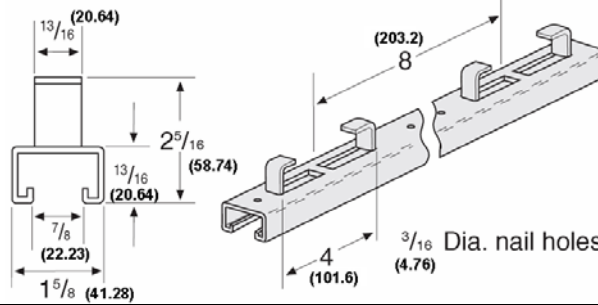

1⁵/₈" X 1³/₁₆" X 12 Gauge

4101 - 4102

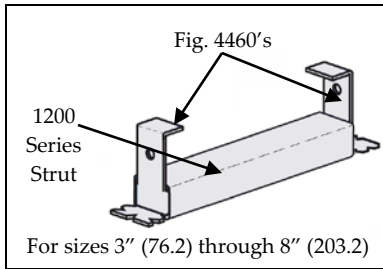

MATERIAL: Low carbon steel
FINISH: Pre-galvanized
ORDERING: Available in various lengths. Specify length and figure number.
Note: Furnished with Expanded Polyethylene filler for clean and easy removal. (Coined steel inserts, plastic closure strips and end caps available upon request.)


Fig. Number				Type - Description	Weight		Bundle Qty.			
10ft.	3.05m	20ft.	6.10m		lbs./ft.	kg/m	10ft.	3.05m	20ft.	6.10m
4101		4102		Continuous Concrete Strut	1.34	(1.99)	240	(73.15)	480	(146.3)

Available in stainless steel. To order, specify 304 or 316 and add suffix SS to fig. number. Price on request.


Length		Max. Allowable Point Load		Min. Spacing of Point Loads		Max. Allowable Uniform Load		Weight Each.	
in.	mm	lbs.	kN	in.	mm	lbs.	kN	lbs	kg
3	(76.2)	400	(1.78)	-	-	400	(1.78)	0.34	(0.15)
4	(101.6)	500	(2.22)	-	-	500	(2.22)	0.45	(0.20)
6	(152.4)	750	(3.33)	-	-	750	(3.33)	0.67	(0.30)
8	(203.2)	1000	(4.45)	-	-	1000	(4.45)	0.89	(0.41)
12	(304.8)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	1.34	(0.61)
16	(406.4)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	1.79	(0.81)
20	(508.0)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	2.23	(1.01)
24	(609.6)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	2.68	(1.22)
32	(812.8)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	3.57	(1.62)
36	(914.4)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	4.02	(1.82)
40	(1016.0)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	4.47	(2.03)
48	(1219.2)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	5.36	(2.43)
60	(1524.0)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	6.70	(3.04)
72	(1828.8)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	8.04	(3.65)
84	(2133.6)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	9.38	(4.25)
96	(2438.4)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	10.72	(4.86)
108	(2743.2)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	12.06	(5.47)
120	(3048.0)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	13.40	(6.08)
144	(3657.6)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	16.08	(7.29)
168	(4267.2)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	18.76	(8.51)
192	(4876.8)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	21.44	(9.73)
216	(5486.4)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	24.12	(10.94)
240	(6096.0)	1500	(6.67)	12	(304.8)	1500 ^{lbs/ft}	(21.89 ^{kN/m})	26.80	(12.16)

PHD figure numbers 4101 and 4102 have a maximum recommended load rating of 1500^{lbs/ft} (21.89^{kN/m}) section. This load rating was based upon a concrete compressive strength of 3000psi. (20.68 mPa) and a safety factor of 3. PHD figure numbers 4101 and 4102 can utilize strut nuts that were designed for use with 1200 series strut channel.



Minimum Edge Distance to Achieve Rated Pull-Out Capacity

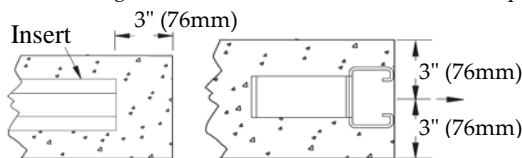

The maximum allowable uniform load must be placed as a series of point loads.

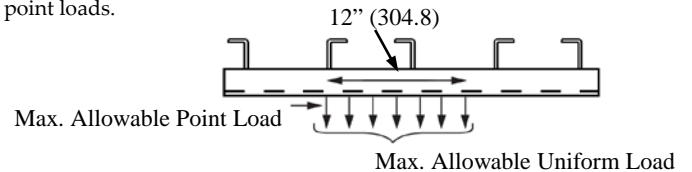

Min. Load Spacing

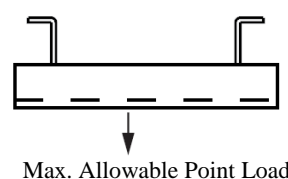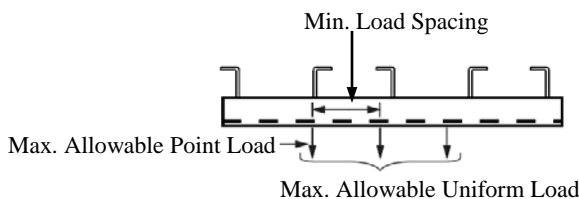

The maximum allowable point load may be placed anywhere along the insert.

All loads placed less than 2" from the end of an insert must be reduced by 50%.

Unless otherwise specified, all dimensions on drawings and in charts are in inches and dimensions shown in parentheses are in millimeters.