

# STRUT CLAMPS



## 8 Series Klo-Shure Clamp for Elastomeric Insulation

824050 - 828262

1/2" Insulation Thickness A							
Figure Number	Outer Diameter B		Coupling Outer Diameter C		Standard Package	Wt. Each	
						Lbs.	kg
824050	1/2	(12.70)	1 5/8	(41.28)	25	0.05	(0.02)
824062	5/8	(15.88)	1 3/4	(44.45)	25	0.06	(0.02)
824087	7/8	(22.23)	2	(50.80)	25	0.07	(0.03)
824112	1 1/8	(28.58)	2 1/4	(57.15)	25	0.08	(0.03)
824137	1 3/8	(34.93)	2 1/2	(63.50)	25	0.09	(0.04)
824162	1 5/8	(41.28)	2 3/4	(69.85)	25	0.10	(0.05)
824212	2 1/8	(53.98)	3 1/4	(82.55)	25	0.13	(0.06)

3/4" Insulation Thickness A							
Figure Number	Outer Diameter B		Coupling Outer Diameter C		Standard Package	Wt. Each	
						Lbs.	kg
826062	5/8	(15.88)	2 1/4	(57.15)	25	0.08	(0.03)
826087	7/8	(22.23)	2 1/2	(63.50)	25	0.09	(0.04)
826112	1 1/8	(28.58)	2 3/4	(69.85)	25	0.10	(0.05)
826137	1 3/8	(34.93)	3	(76.20)	25	0.12	(0.05)

1" Insulation Thickness A							
Figure Number	Outer Diameter B		Coupling Outer Diameter C		Standard Package	Wt. Each	
						Lbs.	kg
828087	7/8	(22.23)	3	(76.20)	25	0.12	(0.05)
828112	1 1/8	(28.58)	3 1/4	(82.55)	25	0.12	(0.06)
828137	1 3/8	(34.93)	3 1/2	(88.90)	25	0.13	(0.06)
828162	1 5/8	(41.28)	3 3/4	(95.25)	25	0.14	(0.06)
828212	2 1/8	(53.98)	4 1/4	(107.95)	25	0.16	(0.07)
828262	2 5/8	(66.68)	4 3/4	(120.65)	25	0.17	(0.08)

### MATERIAL:

Washington Penn TPO in accordance with ASTM D 4000, TEO0120, A45000.


Classified 2043 (25/50) for use in plenums and air handling systems.

### FINISH:

Plain

### ORDERING:

Specify figure number.

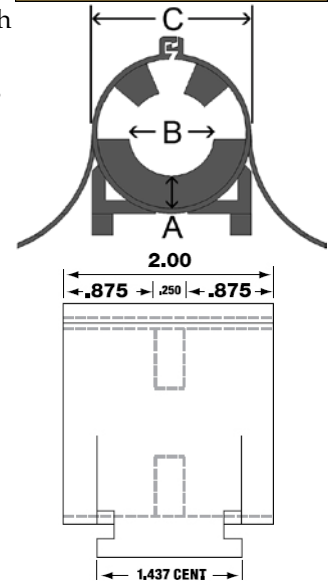

Unless otherwise specified, all dimensions on drawings and in charts are in inches and dimensions shown in parentheses are in millimeters.