

STRUT CLAMPS



9 Series Klo-Shure Clamp for Fiberglass Insulation

922060 - 929190

Tubing Sizes							
Figure Number	Outer Diameter B		Coupling Outer Diameter C		Standard Package	Wt. Each	
						Lbs.	kg
1/2" Insulation Thickness A							
924062	5/8	(15.88)	1.785	(45.34)	20	0.46	(0.21)
924087	7/8	(22.23)	2.025	(51.44)	20	0.49	(0.22)
924112	1 1/8	(28.58)	2.285	(58.04)	20	0.52	(0.24)
924137	1 3/8	(34.93)	2.5	(63.50)	10	0.58	(0.26)
924162	1 5/8	(41.28)	2.845	(72.26)	10	0.63	(0.29)
924212	2 1/8	(53.98)	3.285	(83.44)	10	0.73	(0.33)
1" Insulation Thickness A							
928062	5/8	(15.88)	3.008	(76.40)	10	0.63	(0.29)
928087	7/8	(22.23)	3.008	(76.40)	10	0.67	(0.30)
928112	1 1/8	(28.58)	3.008	(76.40)	10	0.73	(0.33)
928137	1 3/8	(34.93)	3.638	(92.41)	10	0.76	(0.34)
928162	1 5/8	(41.28)	3.638	(92.41)	10	0.78	(0.35)
928212	2 1/8	(53.98)	4.138	(105.11)	10	0.86	(0.39)
928262	2 5/8	(66.68)	4.648	(118.06)	10	0.95	(0.43)
928312	3 1/8	(79.38)	5.138	(130.51)	10	1.05	(0.48)
1-1/2" Insulation Thickness A							
929087	7/8	(22.23)	4.138	(105.11)	10	0.84	(0.38)
929112	1 1/8	(28.58)	4.138	(105.11)	10	0.86	(0.39)
929137	1 3/8	(34.93)	4.648	(118.06)	10	0.93	(0.42)
929162	1 5/8	(41.28)	5.138	(130.51)	10	0.95	(0.43)
929212	2 1/8	(53.98)	5.138	(130.51)	10	1.05	(0.48)
2" Insulation Thickness A							
922062	5/8	(15.88)	4.648	(118.06)	10	0.63	(0.29)
922087	7/8	(22.23)	5.138	(130.51)	10	0.99	(0.45)
922112	1 1/8	(28.58)	5.138	(130.51)	10	1.01	(0.46)
922137	1 3/8	(34.93)	5.698	(144.73)	10	1.23	(0.56)
922162	1 5/8	(41.28)	5.698	(144.73)	5	1.28	(0.58)

CLAMP MATERIAL:

Low carbon steel

CUSHION MATERIAL:

Washington Penn TPO in accordance with ASTM D 4000, TEO0120, A45000.

Classified 2043 (25/50) for use in plenums and air handling systems.

FINISH:

Western gold


ORDERING:

Specify figure number.

Available in stainless steel.

To order, specify 304 or 316 and add suffix SS to figure number.

Price on request.

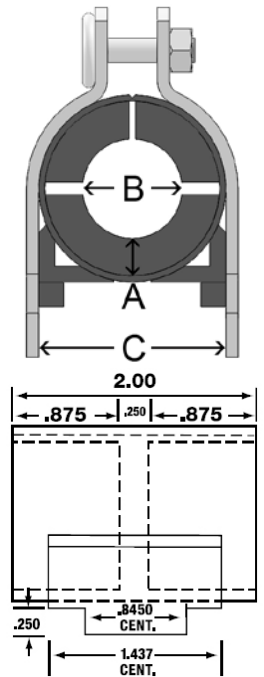

Pipe Sizes							
Figure Number	Pipe Size B		Coupling Outer Diameter C		Standard Package	Wt. Each	
						Lbs.	kg
1/2" Insulation Thickness A							
924084	1/2	(15)	2.025	(51.44)	20	0.49	(0.22)
924105	3/4	(20)	2.285	(58.04)	20	0.50	(0.23)
924131	1	(25)	2.500	(63.50)	10	0.57	(0.26)
924166	1 1/4	(32)	2.845	(72.26)	10	0.63	(0.29)
924190	1 1/2	(40)	3.285	(83.44)	10	0.68	(0.31)
1" Insulation Thickness A							
928084	1/2	(15)	3.008	(76.40)	10	0.65	(0.29)
928105	3/4	(20)	3.008	(76.40)	10	0.72	(0.33)
928131	1	(25)	3.638	(92.41)	10	0.75	(0.34)
928166	1 1/4	(32)	3.638	(92.41)	10	0.79	(0.36)
928190	1 1/2	(40)	3.950	(100.33)	10	0.80	(0.36)
928237	2	(50)	4.648	(118.06)	10	0.89	(0.40)
928287	2 1/2	(65)	5.138	(130.51)	10	0.97	(0.44)
1-1/2" Insulation Thickness A							
929084	1/2	(15)	4.138	(105.11)	10	0.81	(0.37)
929105	3/4	(20)	4.138	(105.11)	10	0.84	(0.38)
929131	1	(25)	4.648	(118.06)	10	0.94	(0.43)
929166	1 1/4	(32)	5.138	(130.51)	10	0.97	(0.44)
929190	1 1/2	(40)	5.138	(130.51)	10	1.01	(0.46)

Unless otherwise specified, all dimensions on drawings and in charts are in inches and dimensions shown in parentheses are in millimeters.