




www.phd-mfg.com

BEAM CLAMPS

FIG. 250

STEEL C-CLAMP WITH LOCKNUT

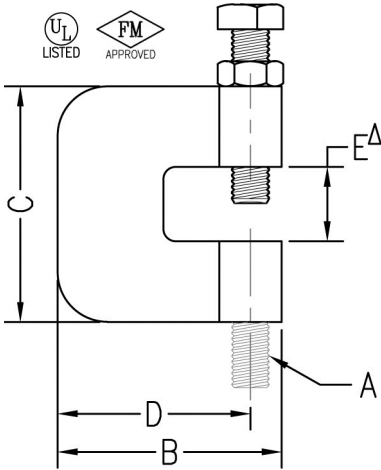

Function: Designed for attaching hanger rod to the bottom flange of a beam. The hanger rod should make contact with the beam flange to ensure full engagement.

Material: Carbon steel with hardened steel cup point set screw (Type 304 or 316 Stainless Steel upon request)

Finish: Plain or electro-galvanized

Approvals: Underwriters' Laboratories Listed in the U.S. (UL) for $\frac{3}{8}$ " and $\frac{1}{2}$ " sizes only. Factory Mutual Approved for $\frac{3}{8}$ " rod size only. Complies with Federal Specifications A-A-1192A (Type 23) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 23) which supersedes ANSI/MSS SP-69. (Approvals are only for Fig. 250 with locknut).

Ordering: Specify figure number, rod size, material, and finish.

NOTE: When a torque wrench is unavailable, the setscrew should be tightened so it contacts the I-beam and then an additional $\frac{1}{4}$ to $\frac{1}{2}$ turn.

Set Screw Torque				
Nominal Thread Size	$\frac{3}{8}$	$\frac{5}{8}$	$\frac{3}{4}$	Caution should be taken not to over tighten the set screw
Rec. in-lbs.	60	250	400	
Torque N-m	(6.8)	(28.2)	(45.2)	

Rod Size A	B		C		D		EA		Max. Pipe Size		Max. Rec. Load		Wt. Each			
													w/o nut		with nut	
													lbs.	kN	lbs.	kg
$\frac{3}{8}$	2 $\frac{1}{4}$	(57.15)	2 $\frac{3}{8}$	(60.33)	$\frac{7}{8}$	(22.23)	$\frac{3}{4}$	(19.05)	4	(100)	400	(1.78)	.36	(.16)	.38	(.17)
$\frac{1}{2}$	2 $\frac{1}{4}$	(57.15)	2 $\frac{3}{8}$	(60.33)	$\frac{7}{8}$	(22.23)	$\frac{3}{4}$	(19.05)	4	(100)	500	(2.22)	.36	(.16)	.38	(.17)
$\frac{5}{8}$	2 $\frac{3}{8}$	(60.33)	2 $\frac{3}{8}$	(60.33)	$\frac{3}{4}$	(19.05)	$\frac{3}{4}$	(19.05)	5	(125)	550	(2.45)	.63	(.29)	.68	(.31)
$\frac{3}{4}$	2 $\frac{1}{4}$	(57.15)	2 $\frac{3}{8}$	(60.33)	$\frac{3}{4}$	(19.05)	$\frac{3}{4}$	(19.05)	6	(150)	600	(2.67)	.72	(.33)	.79	(.36)
$\frac{7}{8}$	3 $\frac{1}{4}$	(57.15)	3	(76.20)	1 $\frac{1}{4}$	(31.75)	1	(25.40)	8	(200)	900	(4.00)	1.65	(.75)	1.83	(.83)

Δ Reduced by $\frac{1}{8}$ " (3.18mm) when used in conjunction with Fig. 259 retaining strap.

THREADED ACCESSORIES
CPVC STRAPS
BAND HANGERS
BEAM CLAMPS
CLEVIS HANGERS
PIPE ROLLER SUPPORTS
SPLIT RING HANGERS
PIPE CLAMPS
CENTER LOAD BEAM CLAMPS
PIPE SHIELDS, INSULATION, & SADDLES
PIPE GUIDES & SLIDES
WALL BRACKETS
PIPE SUPPORTS
STRUCTURAL ATTACHMENTS
SEISMIC BRACING