




www.phd-mfg.com

BEAM CLAMPS

FIG. 259

RETAINING STRAP (For Fig. 250 & 270)

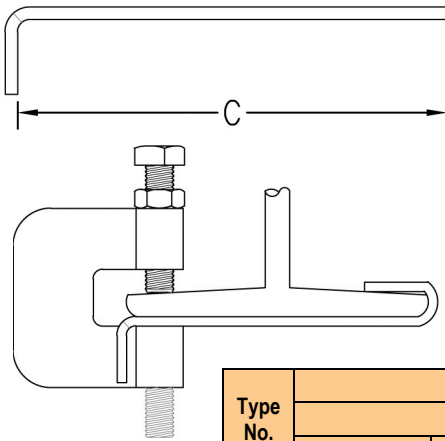

Function: Designed for use with Fig. 250 and 270 to eliminate possible movement of the beam clamp due to vibration.

Material: Carbon steel (Type 304 or 316 Stainless Steel upon request)

Finish: Plain or electro-galvanized

Ordering: Specify figure number, type number, length, material, and finish.

NOTE: 1" (25.4) should be added to beam flange width to determine length.

Type No.	Wt. Each											
	Length C											
	4 1/2 (114.3)		6 (152.4)		8 (203.2)		10 (254.0)		12 (304.8)		14 (355.6)	
1	.15	(3.81)	.22	(5.59)	.33	(8.38)	.36	(9.14)	.43	(10.92)	.50	(12.70)
2	.21	(5.33)	.28	(7.11)	.36	(9.14)	.45	(11.43)	.52	(13.21)	.59	(14.99)

Type No. Selection Chart		
Size	Model No.	
	250	270
3/8	1	2
1/2	1	2
5/8	1	2
3/4	1	2

T
H
R
E
A
D
E
D
A
C
C
E
S
O
R
I
E
S

 C
P
V
C
S
T
R
A
P
S

 B
A
N
D
H
A
N
G
E
R
S

 B
E
A
M
C
L
A
M
P
S

 C
L
E
V
I
S
H
A
N
G
E
R
S

 P
I
P
E
R
O
L
L
E
R
S
U
P
P
O
R
T
S

 S
P
L
I
T
R
I
N
G
H
A
N
G
E
R
S

 P
I
P
E
C
L
A
M
P
S

 C
E
N
T
E
R
L
O
A
D
B
E
A
M
C
L
A
M
P
S

 P
I
P
E
S
H
I
E
L
D
S
I
N
S
U
L
A
T
I
O
N
A
N
D
S
A
D
D
L
E
S

 P
I
P
E
G
U
I
D
E
S
&
S
L
I
D
E
S

 W
A
L
L
B
R
A
C
K
E
T
S

 P
I
P
E
S
U
P
P
O
R
T
S

 S
T
R
U
C
T
U
R
A
L
A
T
T
A
C
H
M
E
N
T
S

 S
E
I
S
M
I
C
B
R
A
C
I
N
G