

BEAM CLAMPS



RETAINING STRAP (For Fig. 345, 350 & 360)

FIG. 359

Function: Designed for use with Fig. 345, Fig. 350, and Fig. 360 to offer more secure fastening of beam clamps to beam where seismic protection is provided.



Material: Carbon steel (Type 304 or 316 Stainless Steel upon request)

Finish: Pre-galvanized

Approvals: Underwriters' Laboratories Listed in the U.S. (UL) and Canada (CUL) for $\frac{3}{8}$ " and $\frac{1}{2}$ " rod sizes only. Meets NFPA13 requirements for hangers and fasteners subject to earthquakes.


Ordering: Specify figure number, length, rod size, and material.

NOTE: Use jam nut over hanger rod to secure retaining strap. 2 inches (50.8) should be added to beam flange width to determine length.

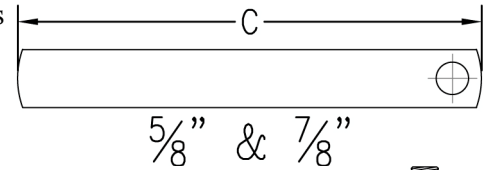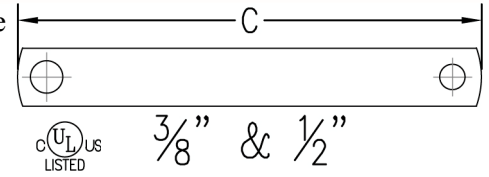

Rod Size	Wt. Each															
	Length C															
	4 1/2 (114.3)		6 (152.4)		8 (203.2)		10 (254.0)		12 (304.8)		14 (355.6)		*16 (406.4)		*18 (457.2)	
$\frac{3}{8}$ & $\frac{1}{2}$.09	(.04)	.12	(.05)	.15	(.07)	.21	(.10)	.22	(.10)	.29	(.13)	.38	(.17)	.42	(.19)
* $\frac{5}{8}$.19	(.09)	.25	(.11)	.34	(.15)	.42	(.19)	.50	(.23)	.59	(.27)	.74	(.33)	.83	(.38)
* $\frac{3}{4}$.19	(.09)	.25	(.11)	.33	(.15)	.41	(.19)	.49	(.22)	.57	(.26)	.74	(.33)	.83	(.38)
* $\frac{7}{8}$.28	(.23)	.37	(.17)	.50	(.23)	.62	(.28)	.75	(.34)	.87	(.39)	.94	(.43)	1.05	(.48)

* Size Not UL Listed

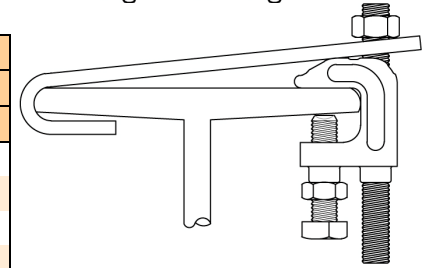

THREADED ACCESSORIES
CPVC STRAPS
BAND HANGERS
BEAM CLAMPS
CLEVIS HANGERS
PIPE ROLLER SUPPORTS
PIPE RING HANGERS
PIPE CLAMPS
CENTER LOAD BEAM CLAMPS
PIPE SHIELDS, INSULATION, & SADDLES
PIPE GUIDES & SLIDES
WALL BRACKETS
PIPE SUPPORTS
STRUCTURAL ATTACHMENTS
SEISMIC BRACING