

BEAM CLAMPS



PURLIN CLAMP

FIG. 290

Function: Designed for use with large-lip rolled steel purlins to eliminate the need to modify steel purlin for standard C-clamp.


Material: Malleable iron with hardened steel cup point set screw and locknut

Finish: Plain or electro-galvanized

Approvals: Underwriters' Laboratories Listed in the U.S. (UL) and Canada (CUL), and Factory Mutual Approved. Complies with Federal Specifications A-A-1192A (Type 23) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 23) which supersedes ANSI/MSS SP-69.

Ordering: Specify figure number and finish.

NOTE: When a torque wrench is unavailable, the setscrew should be tightened so it contacts the I-beam and then an additional 1/4 to 1/2 turn.

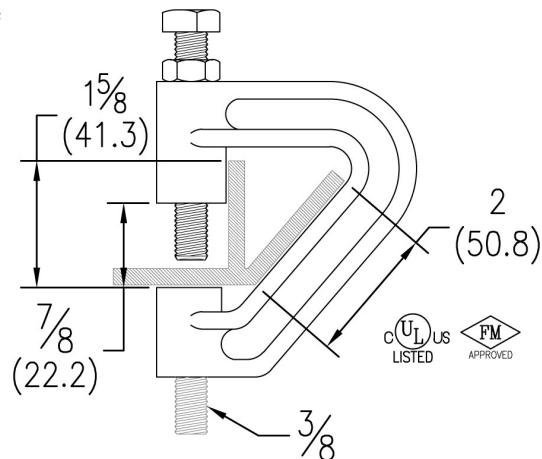

Set Screw Torque		
Nominal Thread Size		3/8
Rec. Torque	in-lbs.	60
	N-m	(6.8)

Caution should be taken not to over tighten the set screw

Rod Size	Max. Pipe Size		Max. Rec. Load		Wt. Each	
			lbs.	kN	lbs.	kg
3/8	4	(100)	400	(1.78)	.82	(.37)

- THREADED ACCESSORIES
- CPVC STRAPS
- BAND HANGERS
- BEAM CLAMPS
- CLEVIS HANGERS
- PIPE ROLLER SUPPORTS
- SPLIT RING HANGERS
- PIPE CLAMPS
- CENTER LOAD BEAM CLAMPS
- PIPE SHIELDS, INSULATION, & SADDLES
- PIPE GUIDES & SLIDES
- WALL BRACKETS
- PIPE SUPPORTS
- STRUCTURAL ATTACHMENTS
- SEISMIC BRACING